




DC INJECTOR IDC1



DC injector IDC1 is two way DC Injector supplies LNB and/or BUC with VDC via radio-frequency cable from a single power source.

Developed for indoor.

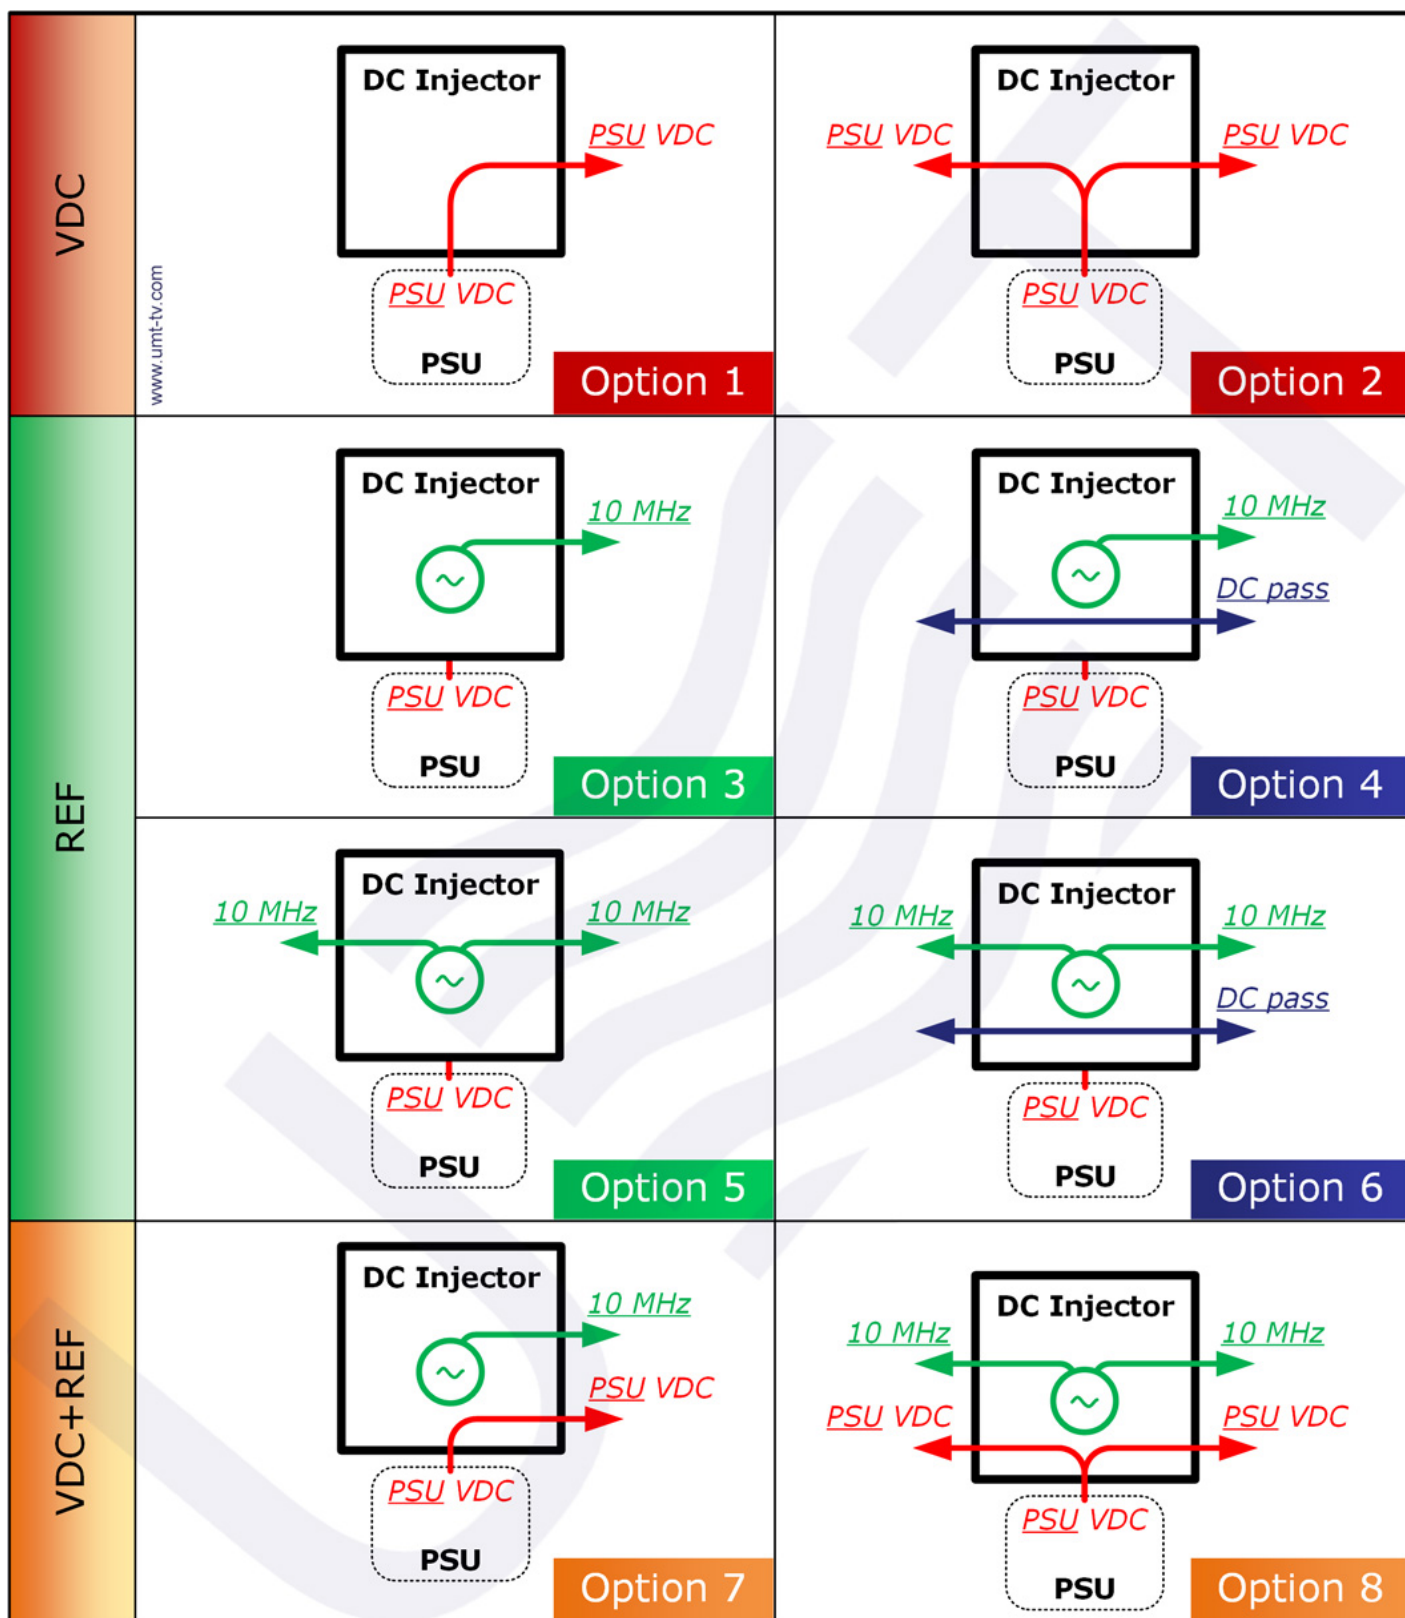

Parameter	Value
Frequency range, MHz	950-2150
Impedance & type of RF connectors, Ohm	50Ω (N-type); 75Ω (F-type)

Supply voltage , VDC (up to)	24
Maximum current , A (total)	4
Insertion loss , dB	<1.0 (full band)
Flatness , dB	± 0.5 (full band) ± 0.2 (any 36MHz)
Return loss , dB	17
Dimensions , mm	115x45x80
Weight , kg	0.15

Taking into consideration that we (UMT LLC) are developer and system integrator, also do not stop on our technical growth and improvement, know that view of all our devices and equipment including their technical parameters may be different from pictures presented on website and parameters

listed on each device webpage.

Note! *All details customer has to confirm in advance during ordering and before payment. Those parameters that were not specified and / or were not agreed while ordering will be implemented as basic at the discretion of the manufacturer. Each our customer has 1.5 year warranty and 7 year aftersales support for whole range of our products.*